



Demagnetizer

ORDER NO. VDM-68



FEATURES

- Suitable for general component spare parts, attachments, tools, etc, for fixed way demagnetization.
- Suitable for longtime use; be able to use continuously for 24 hours.
- With the design of double coils inside to avoid heat release.

DELUXE TYPE

Unit:mm

ORDER NO.	INPUT VOLTAGE	CAPACITY	DUTY CYCLE	DIMENSION			N.W.	CODE NO.
				L	W	H		
VDM-68	AC- 110V 220V	330VA	100%	150	200	100	8.5kg	2019-001

FEATURES

- Input voltage 110-220 Volts AC.
- With On-Off switch.
- Quickly Demagnetizes tools, drills punches, dies, etc. Held by magnetic chucks. Parts are demagnetized by drawing across surface.
- Voltage 200-240 should be ordered.

ORDER NO. VDM-8, 11





Unit:mm

ORDER NO.	INPUT VOLTAGE	WORKING SURFACE	HEIGHT	WEIGHT (KGS)	DUTY CYCLE	CODE NO.
VDM-8	AC- 110V 220V	160x110	100	5	50%	2019-011
VDM-11	AC- 110V 220V	200x280	130	15	100%	2019-012



Mini Type Demagnetizer

For Handy And Big Plate

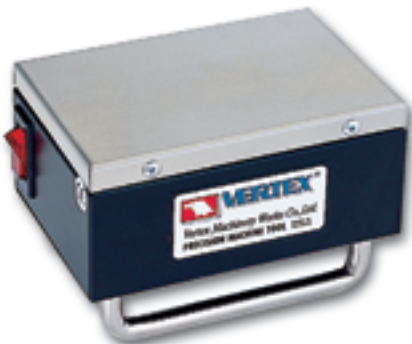

Unit:mm



ORDER NO.	INPUT VOLTAGE	WORKING SURFACE	HEIGHT	WEIGHT (KGS)	DUTY CYCLE	CODE NO.
VDM-9	AC-110V 220V	123x83	83	1.8	90%	2019-020



Tunnel Type Demagnetizer and Magnetizer

FEATURES

- Merely using tools to pass through or move into a tunnel will cause a good demagnetizing effect.
- Suitable for planned automatic process; be adapted for delivery belts to proceed in order to increase productivity.
- Suitable for hand manual tools, etc. for filling magnetism.
- Suitable for large production of component spare parts, attachments, tools...etc.
- Suitable for longtime use; be able to use continuously for 24 hours.
- Super efficacy in demagnetizing and magnetizing; suitable for many kinds of metals.
- Attached a fan inside for dissipating heat.



ORDER NO.	POWER SOURCE	CAPACITY	DIMENSION			THROUGH HOLE		NET WEIGHT	DUTY CYCLE	CODE NO.
			L	W	H	A	B			
VDM-150	AC 220/380V	3520VA	370	370	200	100	150	50kg		2019-025
VDM-250	(single phase)	4840VA	470	370	200	150	250	65kg	100%	2019-026
VDM-450	AC 220/380V (3 phase)	4400VA	700	500	200	250	450	130kg		2019-027